


HDB8229

HDEC® Series LARGE FORMAT BACKPLANE

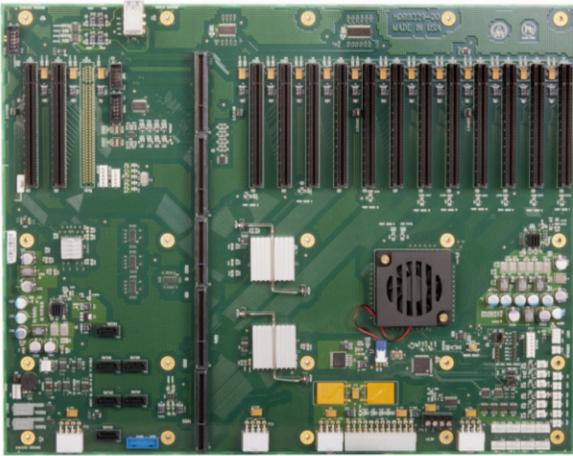


FEATURES

- Large form factor backplane supports one HDEC® system host board
- Provides excellent system expansion and configuration options
- Ideal for dual-processor Trenton HEP8225 HDEC Series system host boards
- PCI Express GEN3 links to the SHB's processors maximizes data throughput speeds
- Supports industry standard PCI Express® 3.0, 2.0 and 1.1 option cards
- Fourteen x16 PCI Express mechanical card slots
- PCIe GEN3 card slot electrical configuration: 4 x16, and ten x8
- Six SATA/600 and two USB 3.0, four USB 2.0 system I/O connections
- Built-in system fan control maximizes system longevity
- Five-year factory warranty
- Made in U. S. A.



BLOCK DIAGRAM:

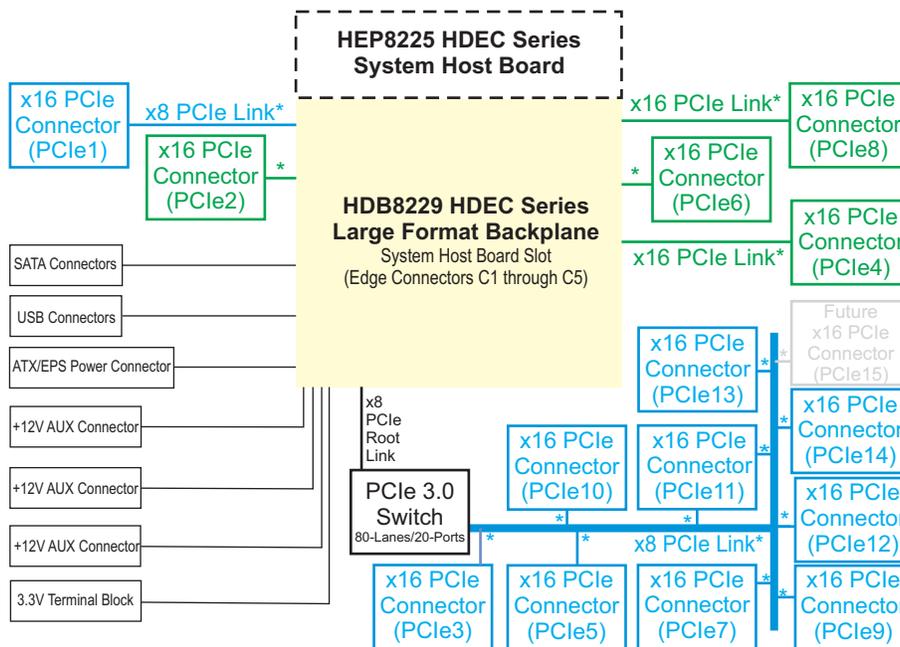

HDEC SERIES LARGE FORM FACTOR BACKPLANE:

The HDB8229 large form factor backplane is ideal for integrating large numbers of PCI Express option cards into a system powered by a HDEC Series SHB from Trenton, such as the HEP8225. The HDB8229 takes full advantage of the eighty (80) available PCI Express GEN3 links from the SHB. All option card slots utilize x16 mechanical connectors with card slots PCIe2, PCIe4, PCIe6 and PCIe8 directly driven at x16 speeds by the SHB's PCIe 3.0 electrical links. A single slot, PCIe1 is driven by a x8 electrical link from the SHB. The remaining card slots are driven with a x8 PCIe 3.0 electrical link from the SHB which is augmented by a 20 port PCIe 3.0 switch. Automatic PCIe link negotiation enables support for a wide variety of PCI Express plug-in cards including GPUs.


APPLICATION EXAMPLES:

The mechanical design of the HDB8229 is targeted toward industry-standard 5U rackmount computer chassis. Expanded system I/O connections are supported by the backplane in conjunction with a compatible HDEC Series SHB like Trenton's HEP8225. The placement of the SHB slot on the backplane and the deployment of various system I/O connectors enables simplified system cabling while maximizing system airflow in order to enable long and trouble-free hardware deployments in robust computing applications. The ability of the backplane to automatically support either PCI Express 3.0, 2.0 or 1.1 cards builds an element of scalability into any system design. The backplane enhances system design flexibility by supporting the many different types of standard plug-in PCI Express option cards used in medical diagnostics, military/aerospace, video wall controllers and communication systems.

HDEC SERIES BACKPLANE MODEL: HDB8229

MODEL#	MODEL NAME	DESCRIPTION
8229-037	HDB8229-CRA	HDEC Series SHB compatible backplane with ATX/EPS and 12V AUX right-angle power connectors, and a 4-position terminal block

HDB8229 BACKPLANE LAYOUT & MOUNTING HOLE PATTERN DIMENSIONS:

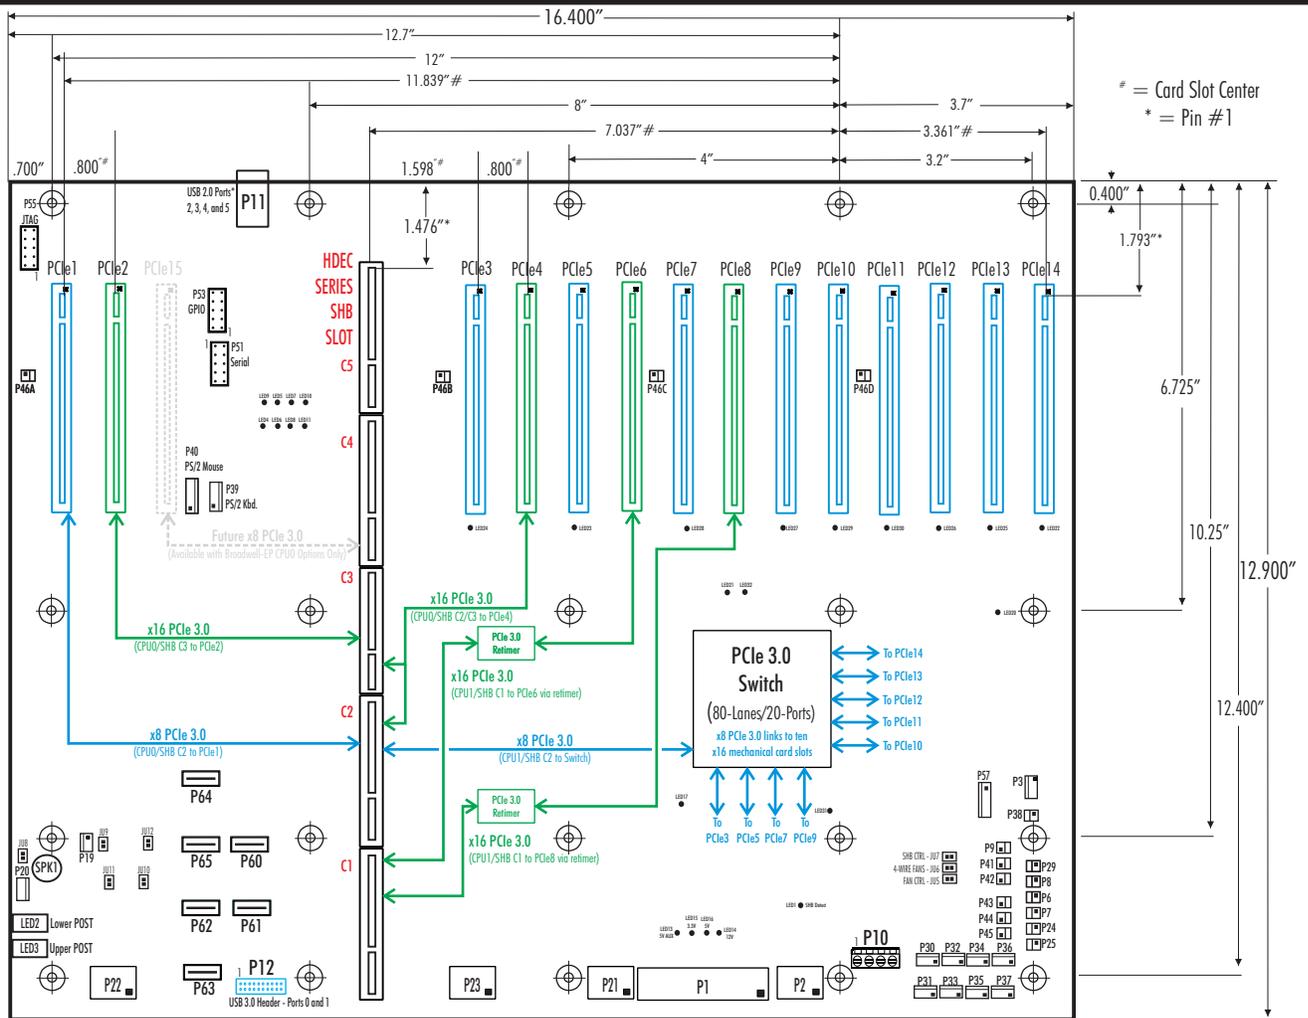

ENVIRONMENTAL SPECS.:#

Operating Temp.: 0° C to 60° C

Storage Temp.: -40° C to 70° C

Humidity: 5% to 90%, non-condensing

#Environmental specifications for system host boards / single board computers are usually lower than those of the backplane. Check with your SHB/SBC vendor.

The Trenton HDB8229 is a lead-free, RoHS compliant backplane.

This backplane is designed to meet worldwide EMI emissions requirements, CE conformity and immunity standards. Contact Trenton for the specific standard numbers for this product.

The Trenton HDB8229 backplane is designed for UL60950 and CAN/CSA C22.2 No. 60950-00.

ENGINEERING NOTES:

1. The power connectors are shown in the layout drawing represents backplane model number 8229-037.
2. Mounting holes: 0.156" diameter
3. Nominal PCB thickness: 0.080"
4. All dimensions are inches.
5. The PCI Express 3.0 links on this HDEC Series backplane are driven directly from the HDEC Series system host board. PCIe 3.0 link re-timers are used to ensure single integrity between the SHB and each plug-in PCIe option card.
6. PCIe electrical interface key for the option card slots:

Green = Slot driven with a x16 PCIe 3.0 link from the HEP8225 SHB

Blue = Slot driven with a x8 PCIe 3.0 link from the HEP8225 SHB

Product Photo Note: The photo of the HDB8229 backplane is provided for illustrative purposes only. Actual connector and mounting locations are illustrated in the backplane layout drawing.

HDEC is a registered trademark of Trenton Systems, Inc. All other product names are trademarks of their respective owners.

Copyright © 2015 by TRENTON Systems Inc. All rights reserved

ADDITIONAL SYSTEM INTERFACE CONNECTIONS, JUMPERS and LEDs:

There are a number of additional connectors, jumpers and LEDs available on the HDB8229 that are designed to simplify cable routing in an embedded computer system and aid in system operation.

Connector	Function	Conn.	Function	Jumper	Function	LEDs	Function
P6	PSON	P45	HDD LED	JU5	Fan Ctrl Enable	3	Lower POST Codes
P7	PWRBTN	P46	3.3V AUX enable (all slots)	JU6	Four-wire FANS	4 - 7	Sys. Fan Present
P8	RESET			JU7	SHB Fan Ctrl	10	1.0v Pwr. Reg. Gd.
P9	PWRGD			JU8	Spk. Enable	11	1.8v Pwr. Reg. Gd.
P24, P25	TEMPO, TEMP1					12	+3.3V Supply
P38	Intruder					13	+5V Supply
P41	FAN Alarm			LEDs	Function	14	+12V Supply
P42	TEMP Alarm			1	SHB Present	15	+5V AUX
P43	VOLT Alarm			2	Upper POST Codes		

